


4022i,5022i,6022i,6022si,6522i, 6522si,9622i,9623i,8023i,3022cf, 6422cf,6422cfp,6822cf

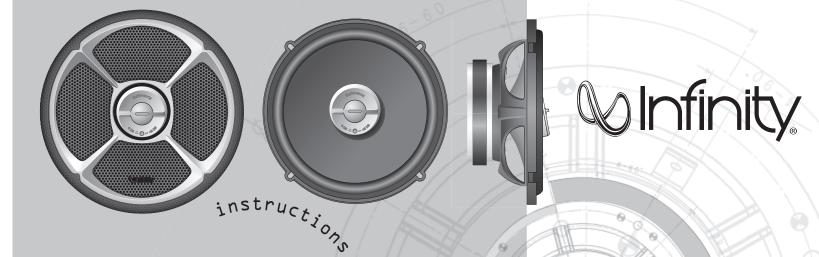

reference series

A valid serial number is required for warranty coverage. Features, specifications and appearance are subject to change without notice. This product is designed for mobile applications and is not intended for connection to the mains. Infinity Systems • 2 note de Tours, 72500 Château du Loir, France • www.infinitysystems.com © 2006 Harman International Industries, Incorporated, All rights reserved. Part No. REFMEOM10/06 Infinity is a trademark of Harman International Industries, Incorporated, registered in the United States and/or other countries. H A Harman International Company

| | Declaration of Conformity |
|---|---|
| | CE |
| | We, Harman Consumer Group International 2. route de Tours |
| | 72500 Château du Loir France |
| | declare in own responsibility that the products described in this owner's manual are in compliance with technical standards: |
| | EN 61000-6-3:2001 EN 61000-6-1:2001 Klaus Lebherz |
| X | Harman Consumer Group International Château du Loir, France 10/06 |

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

| | | | - | | | | |
|--|---|---|--|--|---|---|--|
| Mominal Impedance: Power Handling, RMS: Frequency Response: Sensitivity (283V, 1m): | 94dB 300W 300W 2.65 Ohms | 94dB 300W 300W 46Hz – 21KHz 206M | 2.65 Ohms 76W 226W 24dB 94dB | 265 Оһта 76W 25W 25H/Hz – 21kHz | 2.65 Ohms 120W 72WS – 21kHz 72Hz – 21kHz | 914B 72Hz – 21KHz 3565 Ohms 2.65 Ohms 2.65 Ohms | 33dB 49Hz – 21kHz 180W 2.65 Ohms 2.65 Ohms |
| Type: | 9622i 6 × 9" 2-Way | 6 " × 9" 3-Way 6" × 9" 3-Way | 8023! 8" 3-Way | 3-1/2" 2-Way | 4" x 6" 2-Way | 6422cfp 4" × 6" 2-Way | 6822¢ł 8825¢ł |
| Vominal Impedance: Power Handling, RMS: Frequency Response: Sensitivity (283V, 1m): | 264 35W 35W 92dB 92dB 92dB 92dB | 92dB 45W 135W 135W 20hms 21kHz | 334B 2348 – 21КНz 180М 5.65 Онтs 2.65 Онтs | 23Hz – 51KHz 120M 20M | 2.65 Ohms 180W 180W 581Az – 21kHz | 33dB 58Hz – 21КHz 160W Моалб 2-Way Моалб 2-Way | |
| Type: SPECIFICATIONS | 4022i 4" 2-Way | 5-1/4" 2-Way 5022i | 6022i 2-Way 61/2" 2-Way | 6022si 601/2" Shallow- 6022si | չեW-Տ mmժðt | 16522si 165mm Shallow- VelW-2 fundW | |

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity care adio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

| 93dB 49Hz – 21kHz 80W 2-Way Custon Fit 2-Way Custon Fit | 9148 2.65 Ohms 45W 72Hz – 21KHz 914B | 914B 72H2 - 21KHz 40W 120W 120W 120W | 9148 86Hz – 21KHz 76W 2.65 Ohms Custom Fit | 2.65 Оћта 75W 225W 226W 226W 226M 204B | 2.65 Ohms 100W 300W 21\Hz 21\Hz 20AdB 84dB | 2.65 Ohms 300W 300W 246Hz – 21kHz 94dB | Mominal Impedance: Power Handling, PMS: Power Handling, Peak: Frequency Response: Sensitivity (2,833), 1m): |
|---|---|--|--|---|---|---|---|
| 6822cf 6" × 8"\5" × 7" | 6422cfp 4" × 6" 2-Way | 6422cf 4" × 6" 2-Way | 3-1/2" 2-Way 3022cf | 8023i 8" 3-Way | 9623i 6 × 9" 3-Way | γeW-2 "9 × 9" γ6 22 | Type: |
| | 93dB 160 160W 160W 160W 160W 160W 160W 160W | 6522i 165 Mm2 Z-Way 2.65 Ohms 60W 180W 181Z – 21KHz 93dB 93dB | 93dB 53Hz – 271kHz 66,71km 66,71km 66,71km 160W 160W 160W 160K 160K 160K 160K 160K 160K 160K 160K | 93dB 5-1/2" 2-Way 180W 2.65 Ohms 6-0/W 60W 60W 602H 5-Way 18-P 18-P 18-P 18-P 18-P 18-P 18-P 18-P | 92dB 6-1/4r – 2.1/kHz 136W 136W 136W 136W 100 100 100 100 100 100 100 100 100 10 | 4022i 32.65 Ohms 35W 105W 85H2 – 21kHz 35W 105W 105W 105W 105W 105W 105W 105W 10 | SPECIFICATIONS Type: Nominal Impedance: Power Handling, RMS: Frequency Response: Frequency Response: Sensitivity (2.83V, 1m): |

GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity WARRANTY: Reference Series speaker cones.

| Mominal Impedance: Power Handling, RMS: Power Handling, Peak: Frequency Response: Sensitivity (2.83V, 1m): | 2.65 Ohms 300W 2.65 Ohms 2.65 Ohms | 5448 300M 300M 5642 – 21kHz 7665 Ohms | 2.65 Ohms 2.25W 2.25W 2.65 Ohms 2.65 Ohms | 819B 82H2 – 21КН2 26М 52М 2.65 Орше | 2.65 Ohms 40W 720W 120W 120W 120W 21kHz 72H 72H 72H 72H 72H 72H 72H 72H 72H 72H | 819B 132W 132M 42M 792 Оршг | 2.65 Ohms 180W 93dB 93dB |
|--|--|---|---|---|---|---|---|
| Type: Type: | 9622i β. x 9" 2-Way | 6 ε Ε Ο ματο 9 ε 3-May 9 ε 3-May | 83-May 83-Way | 3022cf 3-1/2" 2-Way Custom Fit | 6422cf 4" x 6" 2-Waγ Custom Fit | 6422cfp 4" x 6" 2-Way Custom Fit Plate | 6822cf 6" × 8"/5" × 7" 5-Way Custom Fit 2-May Custom Fit |
| Nominal Impedance: Power Handling, RMS: Frequency Response: Sensitivity (283V, 1m): | 2.65 Ohms 35W 105W 85Hz – 21kHz 92dB | 924B 45W 135W 21КНz – 21КНz 2.65 21КНz | 2.65 Ohms 180W 180W 2.65 Ohms | 839B 83Hz - 21КHz 20М 90М 90W | 2.65 Оһтя 180W 180W 180Hz – 21КНz 93dB | 33qB 28Hz – 51KHz 20M 20M 20M 20M | |
| Type: SPECIFICATIONS | 4022i 4" 2-Way | 5-1∖4 " 2-₩aγ | 6022i 6-1/2" 2-Way | 6022si 6-1/2" Shallow- Mount 2-Way | 165mm 2-Way 6522i | 6522si 165mm Shallow- Mount 2-Way | |

car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com. Yinfinty lesevers are warranted against defects. The duration of the speaker's warranty depends on the lows in the country in which it was purchased. Your local Infinity

| GENERAL CARE: The louds | speaker grilles may be c | ltolo qmab a dtiw bensel: | nsələ γns əsu ton oC .r | rs or solvents on the gri | les or the speaker cones | | |
|--|-------------------------------------|-------------------------------------|-------------------------------------|--|-------------------------------------|-------------------------------------|-------------------------------------|
| Frequency Response: Sensitivity (2.83V, 1m): | 649B 46H2 – 21КН2 | 949B 46Hz – 21КНz | 649В 46Н2 – 21КН2 | 819B 82Hz – 21кHz | 61qB лкнz | 819B 15Hz – 21КНz | 639В ⊄6Н5 – 21КН2 |
| Power Handling, Peak: | 300M M00L | 300M 300M | 552M 228M | JeM SeM | 120W | 132M 132M 42M | M08L M09 |
| Nominal Impedance: | smdO 78.2 | smdO 736.5 | smdO 765.5 | ti motsu 2.65 Ohms | 5.65 Ohms | Custom Fit Plate 2.65 Ohms | 2-Way Custom Fit 2.65 Ohms |
| _λbe: | 9622i 6 × "θ | 6" × 9" З-Way 9623i | 80 23! 81 3-Way | 3-1/2" 2-Way 3 3-1 /2" 2-Way | 6422cf 4" x 6" 2-Way | 4" X 6" 2-Way 4" X 6" 2-Way | 68226f 6" x 8"/5" x 7" 68226f |
| Power Handling, RMS: Power Handling, Peak: Frequency Response: Sensitivity (2.83V, 1m): | 8548 82Hz – 21KHz 102M 32M | 6598 9248 – 21KHz 138M 48W | 639B 23Hz – 51KHz 180M 90M | 839B 23Hz – S1KHz 120M 20M | 634B 28Hz – 21КHz 180M 90M | 8398 28Н5 – 21КН2 160М 20М | |
| :900 Sanapedani IsnimoN | 2.65 Ohms | smdO 78.2 | 2.65 Ohms | VsW-2 truoM 2.65 Ohms | smdO 68.5 | VeW-5 inoM 2.65 Ohms | |
| Type: Type: | 40221 4" 2-Way | 5-1/4" 2-Way | 6-1/2" 2-Way | 6-1/2" Shallow- suzzei | ا652mm کے Way 1652i | -Molled S. mm231 ISZZG9 | |

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity care retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

| | | | | • | | · · | | 1, 1.3 | | | · · · | | | |
|---|-------------------------|-----------------------|--|--------------|--|---------------|--|-----------------|---|---|---------------|---|---------------------------------|---|
| Type: | | | | eaker cones | rilles or the sp | ig adt no str | iners or solver | sələ yns əsu to | cloth. Do nc | qmeb e dtiw ber | nselo ed ye | speaker grilles ma | ebuol ədT : 3 | GENERAL CAR |
| Mominal Inpedance: Power Handling, Peak Power Handling, Peak Frequency Reapmee: Sensitivity (2.83V, 1m) | - 21kHz hms 21kHz | 180M 90M 5.65 O | 91dB 2.65 Ohms 45W 135W 2.85 Ohms 45W 135W 2.14P | | Custom Fit 2.65 Ohms 40W 120W 120W | s | 91dB 85Hz - 21 25W 25W 25W | | 9498 529W 229W 226W 2268 208 | 498 00M 00M 69 Ohms 65 Ohms | ช 18 11 | 2.65 Ohms 300W 2.65 Ohms 2.65 Ohms | a, Peak: B, Peak: B, RMS: | Mominal Imped Power Handling Power Handling Prequency Resp SSS) VivitiensS SSS) VivitiensS |
| Type: Type: | "\5" x "∂\" | | 4" x 6" 2-Way 4" x 6" 2-Way | | 6422¢ł 4" × 6" 2-Ws | | 3-1/5 5-M 3055¢ł | | 8" 3-V 8023! | " × 9" ع-Way 223i | | 9622i ک-Way ۷۶ ۷-۲ «۶ | | :əd\ī |
| SPECIFICATIONS | 1 | | dbcc | | | | | | anco | 39B | | | ·/···· 'AC | Sensitivity (2.83 |
| | 1 | | 839В 28Н2 – 21КН2 | 71 | 839В 28Н2 – 21КН | 711 | 839B 23Hz - 21 | ZHAIS - | 8986 | 248 742 – 21KHz | | 659B 82Hz – 21КНz | | Frequency Resp |
| car audio retaller can | | | MOGL | -1 | M08L | -11/1 | MOGL | | W081 | M98 | | MSOL | | Power Handling |
| onereficiter cibus rec | 1 | | 20M | | M09 | | MOS | | M09 | M9 | | 32M | | Power Handling |
| GENERAL CARE: The I | 1 | | smdO 20.2 | | smdO <u>6</u> 8.2 | S | mdO 23.2 | swy(| 5.65 C | smdO da. | | smdO <u>6</u> 8.2 | | vəqmi lanimov |
| | 1 | | VeW-S fnuoM | 1. | | | Mount 2- | 1. | | | | 1. | | 1.(|
| Frequency Response: Sensitivity (2.83V, 1m) | | | .165228i 165228i | VeV | 162mm 2-N 6222! | -wolle | 9-1/5" Shi 6022si | YeW-S | "2\1-8 6022! | 223: ۱۹۸۳ ۵۳۵ | - | 4022i 4" 2-Way | SN | Type: SPECIFICATIO |
| Power Handling, Peak: | | | | | | | | | | | | | | |
| Power Handling, RMS | | | | ·uic | ວວ:ຣເມອາຣໄຣໄາແ | | SD 11SIA ƏSPƏI | ont broanct, p | io register y | . Your warranty. | ດ ບາ6ບອເ ອ | you determine the | diau ueo ja | car audio retain |
| :eonsbegml IsnimoN | cal Intinity | ased. Your lo | which it was purch | | | | | | | | | | | |
| :Ape: | | | | | | | | | | | | besker grilles ma | | |
| :00AT | | | | 00000 10100 | | 10 0qt 00 0tc | | | | | | | = = | |
| (| 71.011.7 | 892G | Bb16 | 71 | 801dB | 71.13 | 801G | 71 101 7 | 94dB | tqB | | 94dB | | (8.2) vivitisne2 |
| (mf, VE8.2) viivitieneS | - 21KHz | | 72Hz – 21kHz | 2F | 72Hz – 21kH | 2H3 | 82Hz - 21 | - 21KHz | | 6Hz – 21kHz | | 46Hz – 21kHz | | Power Handling Frequency Resp |
| Frequency Response: Frequency Response: | | M081 M09 | 132M 42M | | 120M | | L5W 26W | | 552M 22M | M00 M00 | | 300M 100M | | Power Handling |
| Power Handling, RMS | swu | 0 99.2 | smdO dð.2 | | smdO 28.2 | s | mdO 28.2 | swur | 2.65 C | smdO dð. | | smdO 26.5 | | beqml IsnimoN |
| 3Mg scilback source | ti-l motsuD | | Custom Fit Plate | | til motsu0 | | 1 moteu | | 0 10 0 | 01010 | 0 | 0 10 10 10 | | · · · · · · · · · · · · · · · · · · · |
| 1 11 . 14 | "[X "] | | VeW-2 "8 x "4 | | 5W-2 "8 × "4 | Λe | 3-1/5" 2-W | Уау | 8" 3-V | үвW-5 "8 х " | 9 | 6" x 9" 2-Way | | :əd\ī |
| Type: | i i | 6822cf | 6422cfp | | 6422cf | | 3022cf | | 8023! | 953! | 6 | 9622 | | _ |
| SPECIFICATIONS | 1 | | 939B | | 892B | | 892GB | | 939B | SdB | 6 | 92dB | ·/IIII 'AG | Sensitivity (2.8 |
| | 1 | | 2HX12 - 21KHz | ZL | 1312 – 218P | ΖЦХ | 234B 23Hz – 21 | ZHAIS - | | 2H2 - 21KHz | | 2H312 - 2H28 | | Frequency Resp |
| car audio retailer can l | | | 120M | -1 | M081 | -11/1 | J20M | | W081 | 32M | | JOPM | | Power Handling |
| onerelieter eibneren | 1 | | POW | | M09 | | MOS | | M09 | M | | 32M | | Power Handling |
| GENERAL CARE: The I | | | smdO 73.2 | | 2.65 Ohms | S | mdO 88.2 | swy(| 2.65 C | smdO čð. | 2 | smdO | sonce: | Nominal Imped |
| | | | VeW-S fnuoM | 1 | | | Mount 2- | (| | (| | 1 | | and () |
| (mf, VE8.2) (initivitiens) | | | -wolled Shallow- | veV | N-2 mm281 | -wolle | 24S "2/1-3 | YeW-S | | YeW-2 "P/I- | - | 4" 2-Way | | Lype: |
| Frequency Response: | | | is2236 | | 92 5 2! | | is2209 | | 9052! | 052! | 9 | 4022! | SN | SPECIFICATIO |
| Power Handling, PMS: Power Handling, Peak: | 1 | | | | | | | | | | | | | |
| :eonsbegml IsnimoN | 1.56 | 51.3 | 9'16 | 2.16 | 7.46 | 7.46 | 7.46 | 1°26 | 63'3 | 93.4 | 93.4 | 9.26 | 9.26 | SPL 2.83V |
| | 778 | 0.98 | 0.98 | 5.98 | 2.68 | 2.68 | 2.68 | 0.88 | 628 | L' <u>7</u> 8 | 978 | 178 | 6.98 | (ab) JASWI |
| Type: | 1.25 5.95 | 6.63 163 | 1.33 7.74 | 74.0 74.8 | 0.54 5.79 | 0'12 9'34 | 0.77 6.34 | 01.1 01.1 | 94.0 96.0 | 20.1 68.7 | 91.9 91.9 | 70.70 0.70 | 20.05 21.01 | Of Otas |
| | 86.1 86.1 | /9.0 | 191 | 209 96'0 | 09.0 | 78.0 | /8.0 | 97.L | 977 01.1 | 1.23 | 21.1 21.1 | 82.0 | 21 01 90'l | sau |
| (mf, ,V68.2) yfivitien92 | 8.88 | r.88 | 5.86 | 5.25r | Z.84 | 79 0 12 10 | 20 U 17'LG | 9.66 | 1.58 | 0.86 | 6'28 | 0.69 | 145.0 | (zH) sF |
| Frequency Response: | £6Z | 2.48 | 5000 | 02.1 | 78.82 | 34.69 | 34.69 | 02.2 | 292 | 747.ð | <u>98.</u> 9 | 68% | 21.1 | (I) S6V |
| Power Handling, Peak: | 821 | 432 | 346 | 382 | 945 | 442 | 442 | 210 | 304 | 221 | <i>LL</i> Z | 221 | 502 | (N/mu) smO |
| Power Handling, RMS | 1.871 | 9.69 | 0'76 | 47.2 | 213.8 | 536.4 | 536.4 | 132.7 | 132.7 | 132.7 | 132.7 | 103.9 | 9.69 | (up ps) bs) |
| Nominal Impedance: | 18.03 | 94Z | 89Z | 3.76 | 24.54 | 21.70 | 21.70 | 12.18 | 12.06 | 15.69 | 12.98 | 10.22 | 6.13 | (b) smM |
| ind/: | 5.14 | 2:37 | 5.24 | 5.46 | 5.25 | 5.30 | 5.30 | 2.52 | 2.31 | 5.19 | 2.09 | 2.27 | 2.18 | DCR (ohms) |
| Type: | 3.69 | 3.82 | 5.55 | 5.83 | P.28 | d'30 | 4.30 | 16.5 | 3.64 | 29.6 | 3.58 | 3'20 | 3.37 | (m-T) J8 |
| SPECIFICATIONS | 6822cf | dfo2S48 | 6422cf | 3022cf | 8053! | 9623! | 9622! | is2239 | 9255! | is2209 | 9052! | 20 5 2! | 4052! | |

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity way infinity systems com. GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

| 93dB 2-Way Custom Fit 2.65 Ohms 2.65 Ohms 2.93dB | Custom Ht Plate 2.65 Ohms 45W 72Hz – 21kHz 78B | 91dB 72Hz – 21kHz 72Hz – 21kHz 70W 120W | 614B 82H2 - 21KHz 72M 52W Cratom Fit | 2.65 Ohms 75W 225W 44B – 21kHz 44B | 2.65 Ohms 300W 2.65 Ohms 2.65 Ohms | 94dB 300W 200W 2,65 Ohms 2,65 Ohms | Nominal Impedance: Power Handling, RMS: Power Handling, Peak: Frequency Response: Sensitivity (2833, 1m): |
|---|--|---|--|--|--|---|--|
| 6822cf "Tanking" and the set of | 6422cfp 4" × 6" 2-Way | 6422cf 4" × 6" 2-Way | 3-1/2" 2-Way | 8023i 8" 3-Way | 9623i γεW-5 "9 × "∂ | 9622! γεW-2 "9 × 9" | Type: |
| | 6522si 160m Shallow- 160W 2.65 Ohms 2.05 Ohms 70M 160W 3dB 3dB | 93dB 165mm 2-Way 180W 180W 93dB 93dB 93dB 93dB 93dB | 93dB 53Hz – 27kHz 53Hz – 27kHz 66, 0hms 760 60, 60, 71kHz 60, 71kHz 60, 71kHz 60, 71kHz 60, 71kHz 60, 71kHz 60, 71kHz 60, 71kHz 60, 71kHz | 93dB 6-1/2" 2-Way 5545 – 21kHz 60W 60W 93dB 93dB 93dB | 92dB 6-1/4" 2-Way 136W 2.65 Ohms 2.65 Ohms 50dB 602dB 7020 7020 7020 7020 7020 7020 7020 702 | 4022i 4022i 35W 105W 85Hz – 21KHz 35W 105W 85Hz – 21KHz 35W 105W 105W 105W 105W 105W 105W 105W 10 | SPECIFICATIONS Type: Nominal Impedance: Power Handling, RMS: Frequency Response: Frequency Response: Senstivity (2.83V, 1m): |

WARRAUTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity warranty depends on the laws in the country in which it was purchased. Your local Infinity car audio retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

| | .S9 | grilles or the speaker con | aners or solvents on the | olo the asy ton of use any cle | o qmsb s dtiw benselo ed | tspeaker grilles may | GENERAL CARE: The loud |
|------------------|------------------|----------------------------|--------------------------|--------------------------------|--------------------------|----------------------|--------------------------|
| 93qB | 81dB | 81dB | 81dB | 94dB | 94dB | 94dB | Sensitivity (2.83V, 1m): |
| 2H312 – 2H64 | 72Hz – 21kHz | 72Hz – 21kHz | 2HAr – 21kHz | 49Hz – 21kHz | 2H312 – 2H842 | 2HA12 – 2HA12 | Frequency Response: |
| W081 | 132M | 120M | MgZ | 525M | 300M | 300M | Power Handling, Peak: |
| M09 | M94 | 40M | 52M | MgZ | WOOL | WOOL | Power Handling, RMS: |
| smdO | smdO 88.S | smdO 88.2 | smdO | smdO | smdO | smdO | :sonsbagml lsnimoN |
| tiT moteuO yeW-S | Sustom Fit Plate | ti∃ motsuO | tiT moteuD | | | | |
| "T x "Z\"8 x "ð | γeW-2 "∂ x "₽ | γeW-Σ "∂ x "₽ | 3-1/2" 2-Way | YeW-5 "8 | үвW-£ "8 × "ð | үвW-2 "8 × "ð | Type: |
| fs22cf | 6422cfp | 6422cf | 3022cf | 8053! | 9623! | 9622 | |
| | 639B | 839B | 839B | 339B | 92dB | 92dB | Sensitivity (2.833, 1m): |
| | 2H312 – 2H83 | 2HX12 – 2H83 | 23Hz – 21kHz | 2HA12 – 21KHz | zHx12 – zH78 | 2HA12 – 2H88 | Frequency Response: |
| | 120M | W081 | MOGL | W081 | 132M | MGOL | Power Handling, Peak: |
| | POW | M09 | POW | M09 | MSt | 32M | Power Handling, RMS: |
| | smdO 88.2 | smdO 88.2 | smdO 28.2 | smdO dð.2 | smdO 26.2 | smdO 28.2 | Nominal Impedance: |
| | VeW-2 innoM | | Viount 2-Way | | | | |
| | -wollad Sinmedi | չեW-Հ mmժði | -wolled? "2/1-a | YeW-2 "2\r-8 | 5-1/4" 2-Way | 4" 2-Way | Type: |
| | is222ai | 92 5 2! | is2208 | 6022 | 2055! | 4022! | SPECIFICATIONS |

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity car and or etailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

| 93dB 2-Way Custom Fit 2.65 Ohms 2.99 2.94B | 914B 75H2 – 21kHz 7565 Ohms 75H2 – 21kHz 75H2 – 21kHz 75H2 75H2 75H2 75H2 75H2 75H2 75H2 75H2 | 91dB 2.65 Ohms 2.65 Ohms 40W 72Hz – 21kHz 40W | 91dB 2567 Ohms 2567 Ohms 2.65 Ohms 2.65 Ohms | 2.65 Ohms 75W 225W 94dB 94dB | 2.65 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms | 94dB 300W 200W 24dB 2,65 Ohms | Nominal Impedance: Power Handling, Peak: Frequency Response: Sensitivity (2.83V, 1m): |
|--|---|--|--|--|--|---|---|
| 68 22¢ł 9≣ × 8∥2⊒ × ∑ | 6422cfp 4" × 6" 2-Way | 6422cf 4" × 6" 2-Way | 3022cf 3-1/2" 2-Way | 80 33! 8033! | 9623i %8W-5 "9 × "6 | 9622i γεW-2 "9 × "ð | Type: |
| | 65226i 1000 Shallow- 160W 160W 2.65 Ohms 2.05 Ohms 160W 3dB 3dB 3dB | 6522i 165 Mm 2-Way 2.65 Ohms 180W 180W 180W 180Hz 121Hz 180 180 180 180 180 180 180 180 180 180 | 93dB 57kHz 93dB 6412" - 21kHz 5.65 Ohms 5.00 6022si 8022si 802555 80255 80255 80255 80255 80255 80555 80555 80555 8 | 6022i 6-1/2" 2-Way 180W 180W 93dB 93dB 93dB 93dB | 924B 6-174" 2-Way 1366 Ohms 2.65 Ohms 2.65 Ohms 46W 146W 162H 202B | 92dB 105W 35W 2.65 Ohms 2.65 Ohms 2.65 Ohms 4022i 4022i 4022i | SPECIFICATIONS Type: Power Handling, Peak: Frequency Response: Sensitivity (2.83V, 1m): |

WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity care at a www.infinitysystems.com.

GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

| | | - 14 + 1 | | and the state of the second se | · · · · · · · · · · · · · · · · · · · | |
|------------------|--|---|---|--|--|--|
| 81dB | 81dB | 8p16 | 84dB | 94qB | 84dB | :(mf ,V58.2) ytivitien92 |
| 72Hz – 21kHz | 72Hz – 21kHz | 82Hz – 21KHz | 2HX12 – 2H64 | zHx12 – zH64z | 2HA12 – 2H6Hz | Frequency Response: |
| 132M | 120W | MgZ | 225M | 300M | 300M | Power Handling, Peak: |
| M9Þ | 40M | SEW | MGL | WOOL | WOOL | Power Handling, RMS: |
| smdO 28.2 | smdO 26.2 | smdO 88.2 | smdO <u>6</u> 8.5 | smdO 88.2 | smdO 78.2 | Nominal Impedance: |
| Sustom Fit Plate | ti∃ moteuO | ti∃ moteuO | | | | |
| γεW-S "∂ × "₽ | γεW-2 "∂ x "₽ | 3-1/2" 2-Way | YeW-5 "8 | үьW-£ "8 × "ð | yeW-2 "8 x "ð | Type: |
| 6422cfp | 6422cf | 3022cf | 8053! | 9623! | 9622! | |
| 339B | A3GB | 339B | age | 8pz6 | 879R | Sensitivity (2.833, 1m): |
| | | | | | | Frequency Response: |
| | | | | | | Power Handling, Peak: |
| | | | | | | Power Handling, RMS: |
| | | | | | | Nominal Impedance: |
| | 0.00 70 70 70 | | 00040 35 0 | 10 30 0 | 0.00 30.0 | |
| | үвүү-с ттебі | | ABVV-2 "2/1-8 | YEVY-2 "4/1-8 | Y677-2 "4 | Iype: |
| 6522si | 66522! | is2209 | 6022! 6022! | 2052! | 4022! | SPECIFICATIONS |
| | 72Hz 21KHz 155Mz 21KHz 2.65 Ohms 48X 4.6.2 VMay 6422cth 93dB 6422cth 160W 6422cth 150W 6422cth | 165mm 2-Way 165mm Shallow- 165mm 2-Way 165mm 5hallow- 2.65 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms 58Hz - 21kHz 58Hz - 21kHz 53dB 93dB 6422cf 6422cf 6422cf 6422cf 6422cf 6422cf 712Mz 7.65 Ohms 72Hz 2.65 Ohms 72Hz 2.65 Ohms 72Hz 2.65 Ohms 72Hz 2.75 Ohms | 86H2 77H2 72H2 72H2 72H2 72H2 56W1 72M3 105mm 2-Way Mount 2-Way Mount 2-Way Mount 2-Way Mount 2-Way 135W 56W1 72H2 21/2" 2.66 Ohms 2.60 M 4.0 M | 6-1/2" 2-Way 6-1/2" 25Maj 91dB 92dB 92dB 93dB 93dB< | 94dB 94dB 94dB 94dB 94dB 91dB 91dB 91dB 04dB 94dB 94dB 94dB 91dB 91dB 91dB 91dB 0500V 255W 75W 256 75W 75W | 4" 2-Way 5-1/4" 2-Way 6-1/2" 2-May 6-1/2" 2-May 6-1/2" 2-May 91dB 91dB 91dB 94dB 94dB 94dB 94dB 91dB 91dB 91dB 200W 300W 300W 725W 75W 75W 72W 72W 72W 72W 92dB 92dB 93dB 93dB 93dB 93dB 93dB 93dB 92dB 92dB 93dB 93dB 93dB 93dB 93dB 93dB 9525H 75W 75W 75W 76B 93dB 93dB 93dB 9528W 45W 60W 60W 60W 60W 76B 76B 76B 9565 Ohms 2.66 Ohms 2.056 Ohms 2.65 Ohms 2.65 Ohms 7.65 7.84 7.84 7.84 9568 93dB 90W 90W <td< td=""></td<> |

GENERAL CARE: The loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones. WARRANTY: Reference Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity warding retailer can help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.


| | | | | 10 1 1 | 1 10 10 | | |
|---|---|--|---|--|---|---|---|
| Nominal Impedance: Power Handling, RMS: Power Handling, Peak: Frequency Response: Sensitivity (2,834, 1m): | 2.65 Ohms 300W 300W 2.65 Ohms | 2.65 Ohms 300W 44dB 94dB 94dB | 944B 756W 226W 2065 Ohms 2.65 Ohms | Custom Hit 2.65 Ohms 2.65 Ohms 2.64 2.64 2.64 2.14 2.14 2.14 2.14 2.14 2.14 2.14 2.1 | Custom Ht 2.65 Ohms 40W 72Hz – 21kHz 72Hd | 91dB 135W 135W 2:65 Ohms 2:65 Ohms 2:65 Ohms | 93dB 2-Way Custom Fit 2.65 Ohms 2.65 Ohms 2.65 Ohms 2.64 Pit 2.64 |
| Type: | 9622i אפW-2 "9" × 9" | 9623! ∨sW-5 "9 × "6 | 8" 3-Way | 3-1∖2⊪ 2-∭aγ | 6422cf 4" × 6" 2-Way | 6422cfp 4" × 6" 2-Way | 6822cf 6822cf |
| SPECIFICATIONS Type: Nominal Impedance: Power Handling, Peak: Frequency Response: Frequency (2.83V, 1m): Sensitivity (2.83V, 1m): | 92d8 35W-27Way 36W 2.65 Ohms 36W 36W 4023 4023 4023 4023 4024 4023 4024 4024 | 92dB 67/4" 2.7KHz 92dB 5.65 Ohms 45W 45W 45W 45W 45W 42W 42 474 74 74 74 74 74 74 74 74 74 74 74 74 | 6023; 6-1/2" 2-Way 8-1/5" – 21kHz 180W 93H5 – 21kHz 93dB 93dB | 6022si 5346 65.1/2" Shallow- 5.65 Ohms 5.65 Ohms 150W 150W 150M 150H 150H 150H 150H 150H 150H 150H 150H | 6622i 165m Z-Way 2.65 Ohms 60W 80W 80M 93dB 2dB | 6522si 165mm Shallow- 166mm Shallow- 5.65 Ohms 50W 160W 184Hz – 21KHz 184Hz – 21KHZ | |


an help you determine the length of your warranty. To register your product, please visit us at www.infinitysystems.com.

pine Series speakers are warranted against defects. The duration of the speaker's warranty depends on the laws in the country in which it was purchased. Your local Infinity ne loudspeaker grilles may be cleaned with a damp cloth. Do not use any cleaners or solvents on the grilles or the speaker cones.

| 639В 46Н5 − 21КН2 | 819B 72Hz – 21КНz | 619B 25H2 – 21КН2 | 814В 82Hz – 21кНz | 649B 46Hz – 21КНz | 649B 40H2 – 21КН2 | 6לק8 לפאב – 21גאב | Frequency Response: Sensitivity (2.83V, 1m): |
|---------------------------------------|-----------------------------------|---------------------------------------|---------------------------------|----------------------|----------------------|----------------------|---|
| M081 M09 | 132M 42M | 40M | 75W 25W | 552M J2M | 300M | 300M | Power Handling, RMS: Power Handling, Peak: |
| 2.65 Smith | 2.65 Ohms | smdO 76.2 | 2.65 Ohms | smhO 78.2 | smdO 88.2 | 29.2 smdO | Nominal Impedance: |
| 6% X × °5/°5 × °5 2-WeW Kit motsuD | 4" x 6" 2-Way Custom Fit Plate | γsW-2 "δ × [#] Custom Fit | 3-1/2" 2-Way Custom Fit | γeW-£ "8 | үвW-5 "8 x "ð | γεW-2 "θ x "ð | Type: |
| 6822cf | 6422cfp | 6422cf | 3022cf | 8053! | 6623 | 9622i | |
| | 639В 28Н2 – 21КН2 | 639В 2845 — 21КН2 | 839B 23H2 – 21КН2 | 839B 23Hz – 21КНz | 65qB 97d2 – 21кНz | 659B 82Hz – 21КНz | Frequency Response: Sensitivity (2.833, 1m): |
| | 150W | W081 | MOGL | W081 | 132M | 10eM | Power Handling, Peak: |
| | 2.65 Ohms 2.65 Ohms | 2.65 Ohms 2.65 Ohms | 2.65 Ohms 2.65 Ohms | 2.65 Chms 20.0 | 2.65 Ohms 45W | 39W 39W | Nominal Impedance: Power Handling, RMS: |
| | an Shallow-ک Mount Mount 2-Way | չեW-Հ mmժði | -Wollan Shallow- VeW-2 fnuoM | γsW-2 "2\1-∂ | Ув₩-2 "₽\Г-д | γsW-2 "₽ | Iype: |
| | 6522si | 66525! | is2209 | 6022 ! | 2032! | 4022! | SPECIFICATIONS |

| ed. Your local Intinity | / IN Which it was purchas | | | | | | Sepression : YTNARAW Car audio retailer can help |
|---|--|---|---|---|--|---|---|
| | | | | | | | GENERAL CARE: The loud |
| 93dB 180W 180W 2.65 Ohms 49Hz – 21kHz 2.40 2.40 2.40 2.40 2.40 2.40 2.40 2.40 | 51450m Hit Plate 2.65 Ohms 45W 72Hz – 21KHz 91dB | 91dB 2.65 Ohms 40W 72Hz – 21kHz 200W | 914B 26W 26W 26W 2.65 Ohms 2.65 20H 2.65 2.64 2.64 2.64 2.64 2.64 2.64 2.64 2.64 | 2.65 Оhms 75W 75W 226W 2.65 Оhms 2.65 Оhms | 94dB 300W 300W 2.65 Оћтs 2.65 Оћтs | 2.65 Ohms 300W 246B – 21kHz 246B | Vominal Impedance: Power Handling, Peak: Power Handling, Peak: Frequency Response: Sensitivity (2,83V, 1m): |
| 6822 cf 6822 cf | 6422cfp 4" × 6" 2-Way | 6422cf 4" × 6" 2-Way | 3-1/2" 2-Way 3022cf | 80 23! 8: 3-May | 9623! 6" × 9" 3-Way | 9622! γεW-2 "9 × "ð | Type: |
| | 93dB 544 – 21kHz 150W 5.65 Ohms 2.65 Ohms | 2.65 Ohms 5.65 Ohms 2.65 Ohms 2.65 Ohms 2.65 Ohms | 639B 23H5 – 21КH2 20M 50Q 5.65 Оhms | 93dB 53Hz – 21KHz 80W 2.65 Ohms | 2.65 Ohms 135W 135W 92dB 92dB | 2.65 Ohms 35W 105W 25dB 2.05M | Nominal Impedance: Power Handling, RMS: Power Handling, Peak: Frequency Response: Sensitivity (2.83V, 1m): |
| | -wollads mmdðf vsW-S fnuoM | yeW-2 mmdðf | -wollsh2 "2\1-8 VsW-2 truoM | γsW-2 "2/Γ-8 | 76W-2 "4/1-3 | γeW-2 "₽ | Type: |

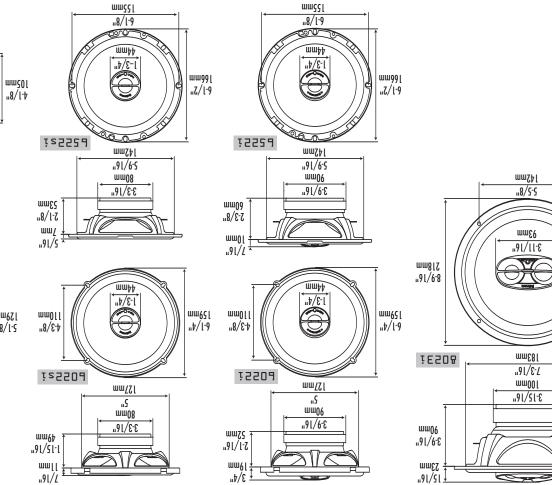

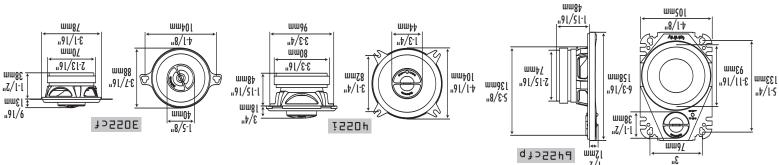

աա977

"8/*L*-8

mm011

#8\&

nm041 "2\1.2

mm721

"Z

1⊃5588

աա09

J-3\8

աաշլ

"2\I

Ĵ

mm701

"\$\[\$

mmčoz

"8\[-8

mm702

"8/l-8

աացքլ

"₽\[-T

ww06


"9l/6-E


16231

"8\T

uul/[

..91/I-E

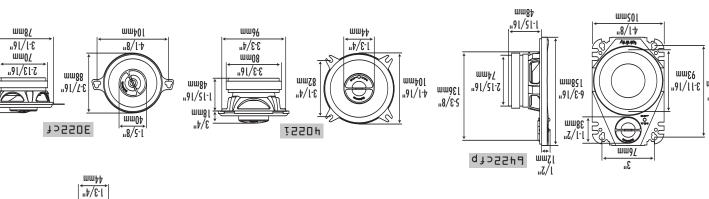

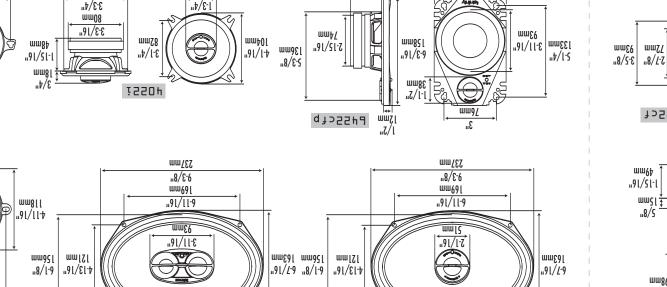

1553P

ww_//

<u>"ðl/l-</u>E

mmOS

"91/81


шш977


...8/*L*-8


mmoll


"8\£4


3











"<u>2-1</u>/4"

աագլ

<u>..8/S</u>

